

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

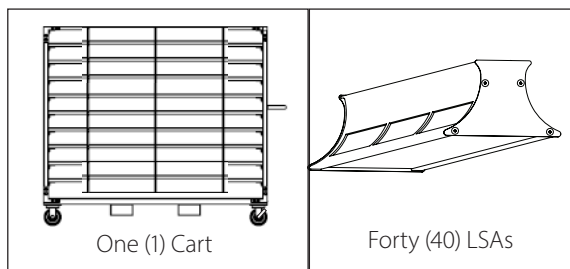


READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

- a) Keep on level ground.
- b) Do not climb on cart.
- c) The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- d) Do not use this equipment for other than its intended use.


SAVE THESE INSTRUCTIONS

What's In The Box



Tools & Materials Needed







Scissors are needed to unpack the boxes.



A wrench and drill are needed to adjust the shelves.



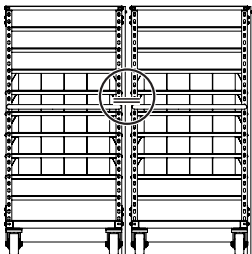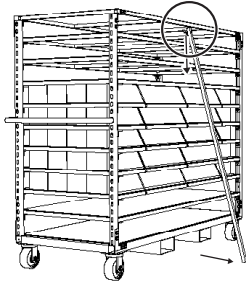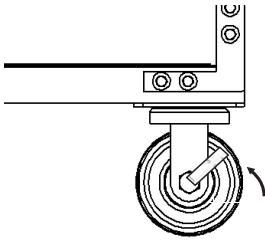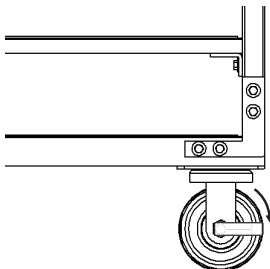OFF-LOADING STEPS

1 Unload all loose fixtures from the container.	2 Locate and unload cart anti-static protective mats from container. Place in safe location for later use.
3a Cut the plastic ties securing the carts together. 	3b Remove center supports from cart by pulling bottom outward and lowering top to disengage support bracket from shelf. 
4a Keeping the cart level, unlock casters then remove the cart from the shipping container. 	4b If a forklift is used to move the cart, use the provided forklift pockets and proper forklift safety procedures. 
5 Roll the cart to the desired location and engage the wheel locks. 	6 Carefully cut away the shrink wrap and remove. 

7 Starting with the highest rack, sever the nylon strapping to free the boxes. Carefully remove boxes from rack.	8 After the top-most shelf is emptied, descend to the next shelf and repeat step seven until the cart is empty.
9 Carefully unwrap and unfold anti-static protective mats.	10 Place one mat on each shelf, green side up.
11 If moving to a different location, unlock wheels, move to next location, repeat steps 5-8 until all fixtures have been unloaded.	12 If the cart is no longer needed, move to its storage location and engage wheel locks.


RE-LOADING STEPS (NOTE: Max loading of cart is 2200lbs (1000kg). Max loading for each shelf is 200lbs (90kg).

1 Engage the cart wheel locks.	2 If needed, adjust the position of the shelves to the desired levels.
2a Loosen the bolts and slide the channel nuts until the shelf is at the correct height. Then reengage the bolts to secure the shelf. Make sure the bolts are sufficiently tight.	2b If not all shelves are required, remove the bolts completely, pull shelf out side of the cart and store safely.

- 3** Starting from the lowest point, load the fixtures onto the shelf.



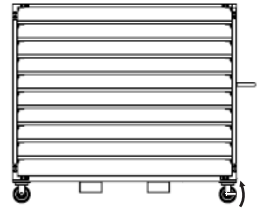- 4** Unlock wheels, move to next location, repeat step 3 until all fixtures have been reloaded.



THANK YOU

FOR YOUR PURCHASE

SHARE YOUR EXPERIENCE WITH US



SCAN the QR or visit
www.nicorlighting.com/support/survey

FOLLOW US     **YouTube**